


PRE-PAK™ OPEN FACE SPRAY BOOTHS

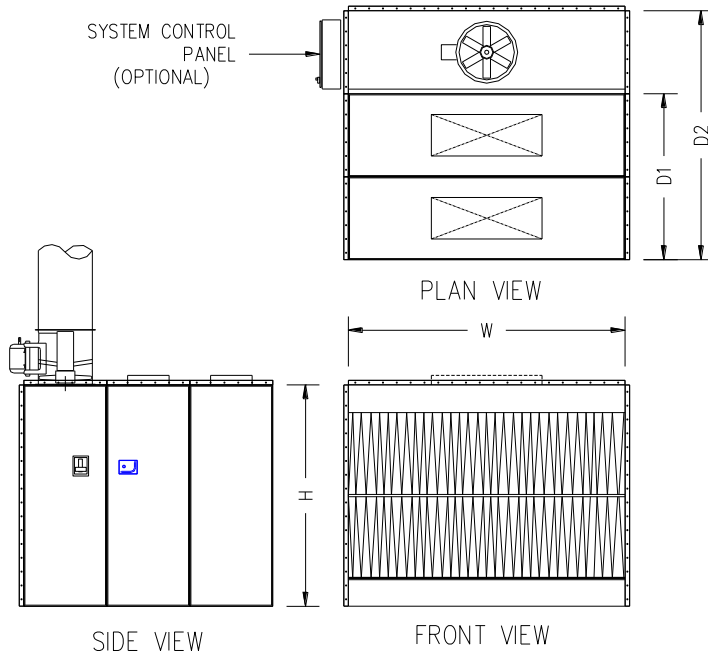

Spray Booth Features

- ❑ 18-gauge Bright Galvanized Material
- ❑ Pre-Punched for Bolted Assembly
- ❑ High Efficiency Tube Axial Fan
- ❑ TEFC 3-phase motor.
- ❑ 2 ft x 4 ft, 4 Tube Light Fixtures
- ❑ Exhaust Stack
- ❑ Roof Curb and Flashing
- ❑ Weather / Velocity Cone
- ❑ Back Draft Dampers
- ❑ Booth Control Center (Optional)
- ❑ Airflow Switch Interlocks (Optional)
- ❑ Manometer Gauge
- ❑ High Efficiency Filters

MODEL	WORKING DIMENSIONS			OVERALL DIMENSIONS			FAN	MOTOR HP	AIRFLOW CFM	LIGHTS
	W	H	D1	W	H	D2				
NOV-08-08-06-TLO	8'-0"	8'-0"	6'-0"	8'-4"	8'-2"	9'-2"	24"	1	6,400	2
NOV-10-08-06-TLO	10'-0"	8'-0"	6'-0"	10'-4"	8'-2"	9'-2"	24"	2	8,000	2
NOV-12-08-06-TLO	12'-0"	8'-0"	6'-0"	12'-4"	8'-2"	9'-2"	30"	1 1/2	9,600	4
NOV-14-08-06-TLO	14'-0"	8'-0"	6'-0"	14'-4"	8'-2"	9'-2"	30"	2	11,200	4
NOV-08-10-06-TLO	8'-0"	10'-0"	6'-0"	8'-4"	10'-2"	9'-2"	24"	2	8,000	2
NOV-10-10-06-TLO	10'-0"	10'-0"	6'-0"	10'-4"	10'-2"	9'-2"	30"	1 1/2	10,000	2
NOV-12-10-06-TLO	12'-0"	10'-0"	6'-0"	12'-4"	10'-2"	9'-2"	30"	2	12,000	4
NOV-14-10-06-TLO	14'-0"	10'-0"	6'-0"	14'-4"	10'-2"	9'-2"	30"	3	14,000	4

Other Booth Sizes Are Available Upon Request.